

Seymour

RURAL EQUIPMENT PTY. LTD.

Phone: (03) 5792 1100 Fax: (03) 5792 4219
 sey-rural@seymour-rural.au.com



THE SEYMOUR COMPOST TURNER 4000

Seymour Rural Equipment have strived to build equipment that is robust and suits the needs of end users Australian wide. Simple clean lines in manufacture lends itself to our machine which is user friendly and durable New innovative drum design and tyne selection to suit all products

SEYMOUR - Turning Waste into PROFIT

bettering the environment


SPECIFICATIONS

- *Tractor size requirement 120 HP+
- *Hood 1.8 m high 3.300 wide
- *Operating speed 500 - 800 metres/hour
- *Hydraulics 30 L/m
 - a/. Raise & Lower Hood
 - b/. Chassie height control
- *P.T.O. 1 $\frac{3}{8}$ - 6 spline standard 540 - 1000 rpm
- *Heavy Duty Shafts & Twin Plate Clutch
- *350 diameter tyre coupling cushioning impact between drum & gearbox
- *320 dia drum on industrial bearings

DESIGNED AND MANUFACTURED TO SUIT AUSTRALIAN CONDITIONS.

- P.T.O. Driven 540 - 1000 RPM
- * Suit windrow 1500 x 3000 wide
- * Provision for water manifold
- * Dual Wheels on Trailer for stability
- * Various tyne designs to suit product being turned from mild steel to bisaloy
- * Easy fold for transport
- * Easy to operate
- * Operation on RH side for ease of control
- * Innovative drum & tyne design to expel maximum co₂

Size - length 6.500 long
 Working width 7.400 m
 Folded For Transport:
 *Width 3.000 m
 *Height 4.000 m
 *Weight 6 ton approx

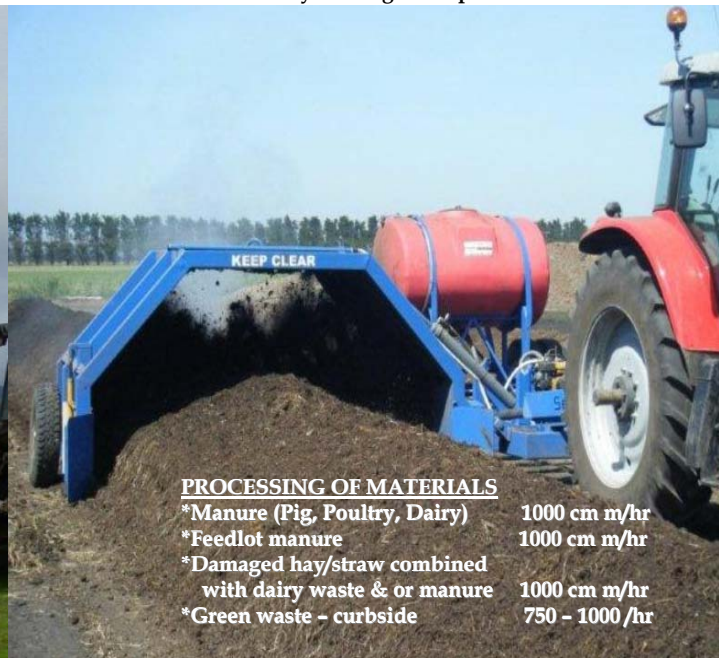

PROCESSING OF MATERIALS

- *Manure (Pig, Poultry, Dairy) 1000 cm m/hr
- *Feedlot manure 1000 cm m/hr
- *Damaged hay/straw combined with dairy waste & or manure 1000 cm m/hr
- *Green waste - curbside 750 - 1000 /hr